
Sensor-switched outdoor light

L 12 S Silver EAN 4007841 657918 Article number 657918



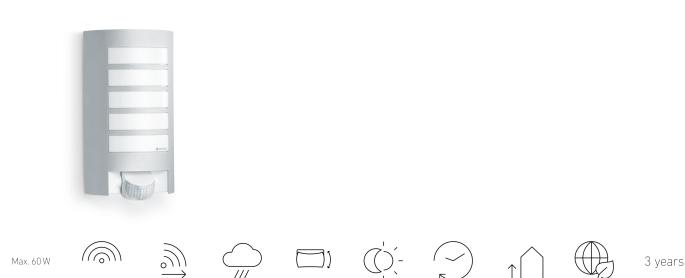

Function description

max. 60 W E27

infrared senso 180°

Looks really good, pricewise too. Designer sensor-switched outdoor light L 12 S, ideal for building entrances and building fronts, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 90° for exact adjustment of the detection zone, aluminium trim panel.

2 - 2000 lux

90° vertical

8 sec - 35 min

ideal 2 m

energy saving

IP44

max. 10 m

Technical specifications

| Dimensions (L x W x H) | 108 x 155 x 272 mm | Slave modeselectable | No |
|-------------------------|---|--|--------------------------------|
| With lamp | No | Sneak-by guard | Yes |
| Manufacturer's Warranty | 3 years | Capability of masking out individual Yes | |
| Settings via | Potentiometers | | No |
| With remote control | No | Electronic scalability | |
| Version | Silver | Mechanical scalability | No |
| | /0070/1/57010 | Reach, radial | $r = 3 m (14 m^2)$ |
| PU1, EAN | 4007841657918 | Reach, tangential | r = 10 m (157 m ²) |
| Application, place | Outdoors | Photo-cell controller | Yes |
| Application, room | outdoors, front door, all round the building, terrace / balcony, courtyard & driveway | Cover material | sticker |
| | | Lamp | All-purpose lamp |
| Installation site | wall | Base | E27 |
| Impact resistance | IK03 | Soft light start | No |
| IP-rating | IP44 | Twilight setting | 2 – 2000 lx |
| Protection class | II | Time setting | 8 s – 35 Min. |
| Ambient temperature | from -20 up to 40 °C | Basic light level function | No |
| Housing material | Aluminium | Interconnection | No |
| Cover material | Plastic, opal | Optimum mounting height | 2 m |

https://www.steinel.de

manufacture's warranty steinel.de/ garantie

Subject to technical modifications

12.2024 Page 1 from 2

Sensor-switched outdoor light


L 12 S Silver EAN 4007841 657918 Article number 657918



Technical specifications

| Mains power supply | 230 – 240 V / 50 Hz | Detection angle | 180 ° |
|----------------------|---------------------|------------------|-------------------------------|
| Output | 60 W | Product category | Sensor-switched outdoor light |
| Power consumption | 0,55 W | | |
| Mounting height max. | 3,00 m | | |

Detection Zone



Possible mounting height: 1,80 m - 3,00 m Orange: radial Black: tangential

Circuit diagram

Dimension Drawing

