

Sensor-switched outdoor light

L 22 S

Stainless steel
EAN 4007841 009816
Article number 009816



Max. 60 W



infrared sensor
180°



max. 10 m



IP44



90° vertical



2 - 2000 lux



8 sec - 35 min



shock proof IK07



Ideal 2 m



energy saving

Function description

The inviting light solution! Designer sensor-switched outdoor light L 22 S with attractive stainless steel trim, ideal for building entrances and building fronts, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 90°.

Technical specifications

Dimensions (L x W x H)	89 x 162 x 286 mm
With lamp	No
Manufacturer's Warranty	3 years
Settings via	Potentiometers
With remote control	No
Version	Stainless steel
PU1, EAN	4007841009816
Application, place	Outdoors
Application, room	outdoors, front door, all round the building, terrace / balcony, courtyard & driveway
Installation site	wall
Impact resistance	IK07
IP-rating	IP44
Protection class	II
Ambient temperature	from -20 up to 40 °C
Housing material	Stainless steel
Cover material	Plastic, opal

Slave modeselectable	No
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Mechanical scalability	No
Reach, radial	r = 3 m (14 m ²)
Reach, tangential	r = 10 m (157 m ²)
Photo-cell controller	Yes
Cover material	sticker
Lamp	All-purpose lamp
Base	E27
Soft light start	No
Twilight setting	2 - 2000 lx
Time setting	8 s - 35 Min.
Basic light level function	No
Interconnection	No
Optimum mounting height	2 m

Sensor-switched outdoor light

L 22 S

Stainless steel
EAN 4007841 009816
Article number 009816




Technical specifications

Mains power supply	220 – 240 V / 50 – 60 Hz
Output	60 W
Power consumption	0,55 W
Mounting height max.	3,00 m


Detection angle	180 °
Product category	Sensor-switched outdoor light

Detection Zone

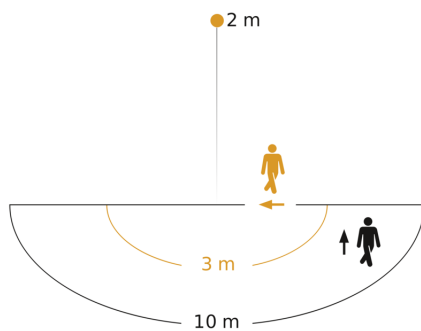

Possible mounting height: 1,80 m - 3,00 m
Orange: radial
Black: tangential

Dimension Drawing

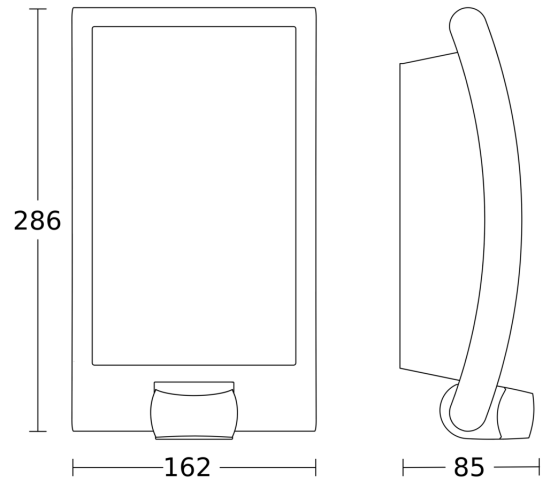

Circuit diagram

